



VHF AND UHF TRANSCEIVERS

IC-F3021T

(VHF transceiver with 10-keypad)

IC-F4021T

(UHF transceiver with 10-keypad)

IC-F3021S

(VHF transceiver without 10-keypad)

IC-F4021S

(UHF transceiver without 10-keypad)



Limited Functions only.



One Rank Up



128 ch /
8 zones

2-Tone, 5-Tone
CTCSS, DTCSS

MDC PTT ID &
MDC emergency call

15.5 hrs. operating
time with BP-232N

8-character
LCD display

Optional voice
scrambler

SIMPLE, RUGGED, VERSATILE FOR THE EVERY



▲ IC-F3021T

▲ IC-F4021S

VHF TRANSCEIVERS

IC-F3021T

With 10-keypad

IC-F3021S

Without 10-keypad

UHF TRANSCEIVERS

IC-F4021T

With 10-keypad

IC-F4021S

Without 10-keypad

Only Icom quality can offer this featured radio. In this compact line, features such as multiple signaling, long battery and wide frequency coverage, handheld easily exceeds your expectations and communication quality.

Compact lightweight body

The rounded compact* design fits comfortably in your palm and is light-weight** for carrying around all day. The large size programmable buttons have ample button-pitch to allow blind touch operation.

* 53(W)×120(H)×36.9(D) mm; 2⁹/₃₂×4²³/₃₂×1⁷/₁₆ in

** 296g; 10.4oz including BP-232N

IP54 dust-protection and splash resistance

The IC-F3021 series meets IP54 requirements for dust-protection and splash resistance. The aluminum die-cast chassis is the basis for this rugged construction, allowing long-life usage in various environments.

128 memory channels and button control memory channel

The IC-F3021 series has 128 memory channels with 8 zones. Memory channel selection can be made easily with the up/down buttons laid out below the PTT button.

Most popular signalings built-in

Use the built-in 2-Tone, 5-Tone, CTCSS and DTCS capabilities as standard to set up your own talk groups, PTT ID and quiet stand-by when others are talking.

Multiple 2-Tone, Multiple 5-Tone

Up to ten 2-Tone and eight 5-Tone codes can be decoded on a channel. When a matched tone is received, the following items are programmable for each code.

- Beep sound • Answer back • Scan
- Bell icon • Radio stun/kill

Lithium-Ion battery standard

Supplied 2000mAh (typ.) Li-Ion battery pack, BP-232N, provides 15.5 hours* of operating time. Li-Ion batteries have virtually no memory issues and allows you flexible charging. * Typical operation; Tx:Rx:Stand-by=5:5:90, power save on

DAY LMR USER

*simple to use but versatile rich
light weight body, many attractive
features, large capacity Lithium-Ion
batteries are built-in. This rugged
device meets all your expectations with reliable perfor-
mance.*

Lone worker function

When the radio is not operated for a preset period, the radio sounds a beep and requires you to push any button. If the radio is not operated for a preset time, an emergency signal automatically transmits and informs your co-worker that something may have happened to the individual worker.

Mode dependent scan

In the mode dependent setting, the scanning setting is dependent on the operating channel. When you change the operating channel, the scanning list automatically changes to the list set for that channel. It is convenient when you move to a different operating area and change an operating channel, you don't have to change the scanning setting.

MDC 1200 compatible

The following MDC features are available with the built-in MDC signaling.

- PTT ID (Tx/Rx) • Radio check (Rx)
- Emergency* (Tx/Rx) • Stun/revive (Rx)
- 5 alias table (Max.) (* No ACK)

Optional internal units

The IC-F3021 series has a 40-pin expansion socket for adding an optional board. A voice scrambler provides secure conversation and the DTMF decoder features has ANI (Automatic Number Identification) capability, depending on the installed board.


Other features

- 2 step power saver
- Wide frequency coverage
- 8 DTMF autodial memories
- Surveillance function temporarily turns off the LED backlight and beep sound
- Optional man down unit, UT-124R
- Normal and priority scan
- Nuisance delete function temporarily deletes a channel from the scanning list
- TOT (Time-Out-Timer) function and lock out penalty timer
- Low battery beep function

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACKS AND CASE



▲ BP-230N ▲ BP-232N ▲ BP-240

Battery packs	Type and capacity	Operating time*	Output power (VHF/UHF)
BP-230N	Li-Ion, 7.4V 950mAh (min.) 980mAh (typ.)	7.35 hours	5W/4W
BP-232N	Li-Ion, 7.4V 1900mAh (min.) 2000mAh (typ.)	15.5 hours	5W/4W
BP-240	AAA (LR03) batteries × 6	—	1W

* Operating time is approximate time (at 20°C). Tx: Rx: standby=5:5:90. Power save on.

REGULAR CHARGER



▲ BC-147 ▲ BC-171

BC-171 DESKTOP CHARGER + BC-147 AC ADAPTER**
Charges the BP-232N in 10 hours (approx.).

** BC-145/BC-147SA for 120V AC.
SE for 230V AC. SV for 240V AC.
BC-145SUK for 230V AC.


RAPID CHARGER



▲ BC-145 ▲ BC-160

BC-160 DESKTOP CHARGER + BC-145 AC ADAPTER**
Charges the BP-232N in 3 hours (approx.).
BC-119N + AD-106 + BC-145** is also available. : Charges the BP-232N in 3 hours (approx.).

POWER SUPPLY CABLES



▲ CP-23L ▲ OPC-515L

CP-23L CIGARETTE LIGHTER CABLE, OPC-515L DC POWER CABLE
For use with the BC-119N. (12-16V DC required).

MULTI-CHARGER



▲ BC-121N+AD-106 (6 pcs.) ▲ OPC-656 ▲ BC-157S

BC-121N MULTI-CHARGER + AD-106 CHARGER ADAPTER + BC-157S AC ADAPTER
Rapidly charges up to 6 battery packs (Six AD-106s are required).
Charges the BP-232N in 3 hours (approx.).

OPC-656 DC POWER CABLE : For use with the BC-121N. (12-20V DC required).

BELT CLIPS AND LEATHER BELT HANGERS



▲ MB-93 ▲ MB-96F

MB-93 : Swivel type belt clip.
MB-94 : Alligator type. Same as supplied.
MB-96N : Swivel type belt hanger.
MB-96F : Fixed type belt hanger.

HEADSETS and PTT/VOX UNIT



▲ HS-94 ▲ HS-95 ▲ HS-97 ▲ VS-1L

HS-94 : Earhook headset with flexible boom microphone.
HS-95 : Behind-the-head headset with flexible boom microphone.
HS-97 : Throat microphone fits around your neck and picks up speech vibration.
VS-1L : PTT/VOX unit. Required when using these headsets with the transceiver.


SPEAKER-MICROPHONES



▲ HM-153L ▲ HM-158L ▲ HM-159L ▲ HM-166L

HM-153L : Durable earphone-microphone with revolving clip.
HM-158L : Compact and durable body with plug screw connector.
HM-159L : Full size durable speaker microphone.
HM-166L : Light-weight earphone microphone with revolving clip.

INTERNAL UNITS

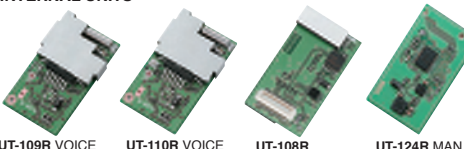

UT-109R VOICE SCRAMBLER UNIT UT-110R VOICE SCRAMBLER UNIT UT-108R DTMF DECODER UT-124R MAN DOWN UNIT

UT-109R : Up to 32 scrambling codes are available. 40-pin type.
UT-110R : Up to 1020 scrambling codes are available. 40-pin type.
UT-108R : Provides DTMF selective call and ANI capabilities. 40-pin type.
UT-124R : Automatically sends an emergency signal when the transceiver is left in a horizontal position for a preset time. 40-pin type.

EARPHONE



SP-13

Provides clear audio in noisy environments.

STUBBY ANTENNAS
• FA-SC56VS: 150-162MHz
• FA-SC57VS: 160-174MHz
• FA-SC73US: 450-490MHz
CUT ANTENNAS
• FA-SC61VC: 136-174MHz
• FA-SC61UC: 380-520MHz
Cut the antenna element to tune to a specific center frequency.
ANTENNAS
• FA-SC25V: 136-150MHz
• FA-SC55V: 150-174MHz
• FA-SC25U: 400-430MHz
• FA-SC57U: 430-470MHz
• FA-SC72U: 470-520MHz

SPECIFICATIONS

GENERAL

- Frequency range :
IC-F3021T/S 136–174MHz
IC-F4021T/S 400–470MHz
450–512MHz
450–520MHz
- Number of channels : 128 channels/8 zones
- Channel spacing : 12.5kHz/25kHz, 15kHz/30kHz
- Type of emission : 11K0F3E, 16K0F3E
- Antenna impedance : 50Ω
- Usable temperature range : –30°C to +60°C; –22°F to +140°F
- Power supply requirement : 7.2V DC
- Current drain (at 7.2V DC; approx.):
Transmit VHF/UHF 1.5A/1.6A (at 5W/4W)
Receive Stand-by 75mA
Rated output 250mA
- Dimensions (with BP-232N) : 53 (W) × 120 (H) × 36.9 (D) mm;
(projections are not included) 2³/₃₂ (W) × 4²³/₃₂ (H) × 1⁷/₁₆ (D) in
- Weight (approx.) VHF : 300g; 10.6oz (with BP-232N)
UHF : 320g; 11.3oz (with BP-232N)

TRANSMITTER

- Output power VHF : 5W, 2W, 1W (Hi, Low2, Low1),
UHF 4W, 2W, 1W (Hi, Low2, Low1)
- Max. frequency deviation : ±5.0/±2.5kHz (Wide/narrow)
- Frequency stability : ±2.5ppm
- Spurious emissions : 80dB typ.
- FM Hum and Noise : 46/40dB typ. (Wide/narrow)
- Audio harmonic distortion : 3% typ. (AF 1kHz, 40% deviation)
- Modulation limiting : 60–100% of max. deviation
- External microphone connector :
3-conductor 2.5 (d) mm (1/10")/2.2kΩ

Measurements made in accordance with EIA/TIA-603. All stated specifications are subject to change without notice or obligation.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. All trademarks are the properties of their respective holders.

RECEIVER

- Sensitivity : 0.25μV typ. (at 12dB SINAD)
- Adjacent channel selectivity : 75/65dB typ. (Wide/narrow)
- Spurious response : 70dB min.
- Intermodulation : 75/74dB typ. (VHF/UHF)
- Hum and noise ratio VHF : 55/50dB typ. (Wide/narrow)
UHF 45/40dB typ. (Wide/narrow)
- Audio output power : 500mW typ.
(at 5% distortion with an 8Ω load)
- External speaker connector: 2-conductor 3.5 (d) mm (1/8")/8Ω

Applicable U.S. Military Specifications


Icom makes rugged products that have been tested to and passed the following MIL-STD requirements and strict environmental standards.

Standard	MIL 810F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain Blowing/Drip	506.4	I, III
Humidity	507.4	–
Salt Fog	509.4	–
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

SUPPLIED ACCESSORIES

(May differ according to version)

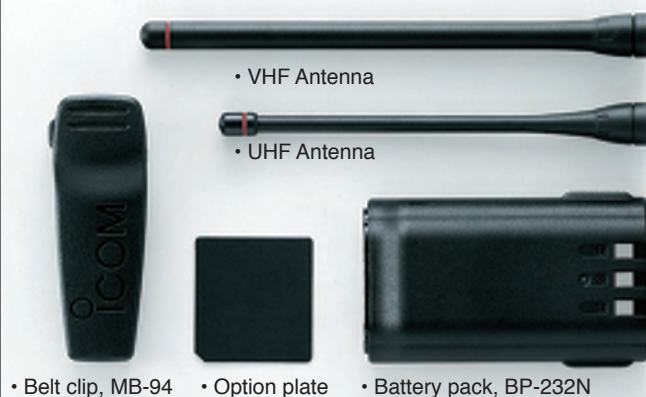

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone : +49 (6196) 76685-0
Fax : +49 (6196) 76685-50
E-mail : info@icom-europe.com
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Blacksole House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone : +44 (01227) 741741
Fax : +44 (01227) 741742
E-mail : info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonec des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : <http://www.icom-france.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone : +48 (58) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolksa@icompolksa.com.pl
URL : <http://www.icompolksa.com.pl>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
E-mail : bjicom@bjicom.com
URL : <http://www.bjicom.com>

Your local distributor/dealer: